

# POWERCHOCK 5


ERGONOMIC WHEEL RESTRAINT SYSTEM

5



## PROTECT YOUR LOADING DOCK PERSONNEL

With the use of an ergonomic articulated arm, the operation of the POWERCHOCK 5 is virtually effortless for all drivers.

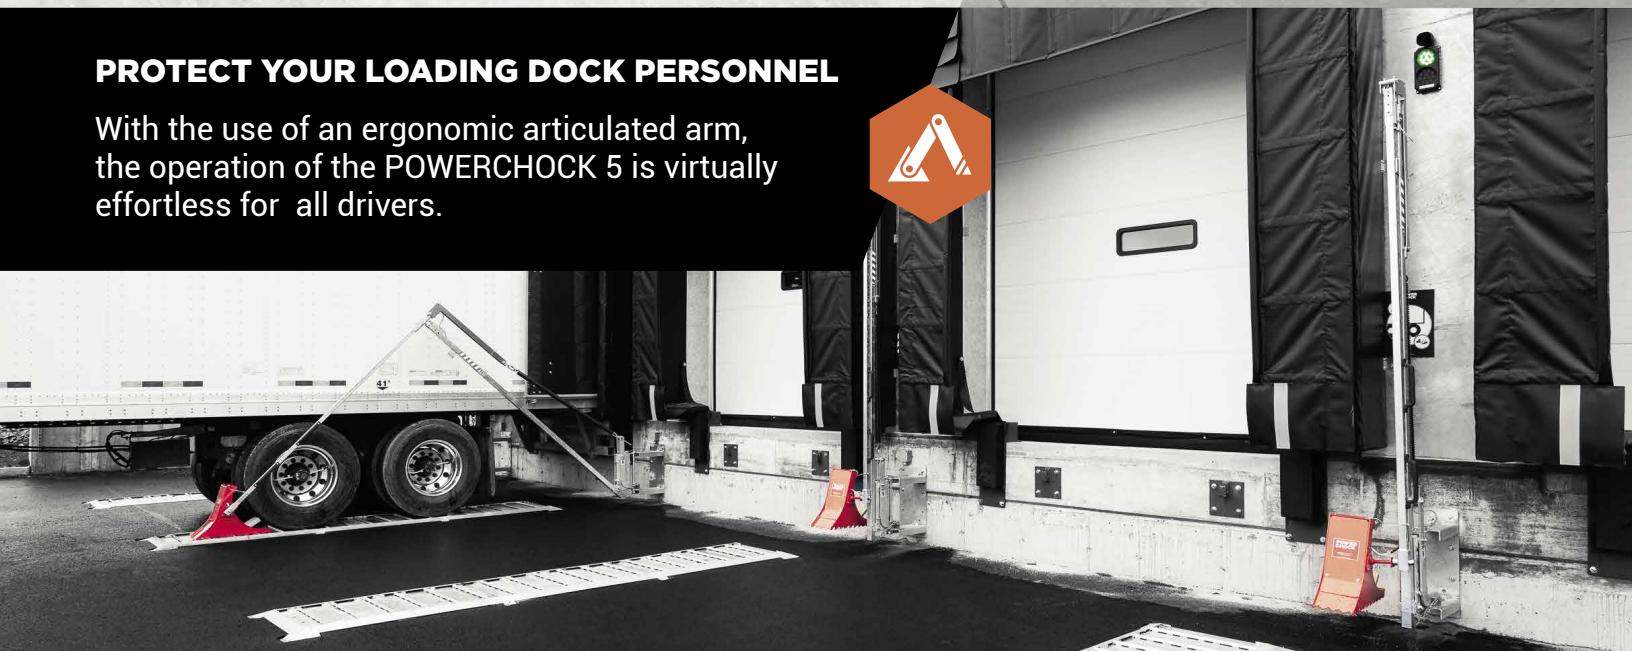



**EXCLUSIVE**



**WARRANTY**

- RUGGED**
- RELIABLE**
- EASY-TO-HANDLE**



**QUALITY & ROBUSTNESS**



**WINTER RESISTANT**



**LOWEST TCO**



**UNIVERSALLY COMPATIBLE**



**ALL GROUNDS & SPACES**




**RAPID & INTUITIVE**

## TECHNICAL SPECIFICATIONS

## POWERCHOCK 5

- High-tensile steel wheel chock installed on an ergonomic articulated arm.
- Three sections (totalling 12 feet) of hot-dip galvanized steel, ground-fixed restraining plate, in the dock bay area.
- 3 sensors linked to an audiovisual communication system:
  - Equipped with wheel sensor inside chock to confirm proper wheel chock placement
  - Dock sensor to confirm start and completion of loading
  - Sensor to confirm return of arm to resting position on the wall
- Communication system equipped with indoor control box, visual indicators (red/green LED lights), and audible alarm. "Chock engaged" indicator light and self-diagnostic function included. Also equipped with exterior LED traffic lights and an audible alarm.

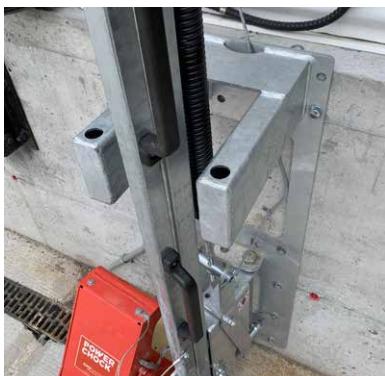

<b>Chock Height</b>	19 in
<b>Lifting Effort</b>	22 lbs
<b>Handling effort</b>	+/- 12lbs

Additional heights available.

